

PU-3 SERIES

3W UNREGULATED



FEATURES

- SINGLE IN LINE PACKAGE
- 3W UNREGULATED OUTPUT POWER
- 100% BURN-IN
- HIGH EFFICIENCY
- INTERNAL SMD TECHNOLOGY
- LOW COST
- NO HEATSINK REQUIRED
- UL 94V-0 PACKAGE MATERIAL
- CUSTOM SOLUTIONS AVAILABLE
- RoHS COMPLIANT



OUTPUT SPECIFICATIONS

Voltage Set-point Accuracy	+/-2% max
Temperature Coefficient	+/-0.05%/°C
Ripple & Noise(20MHz BW) ¹	100mVp-p max
Line Regulation ²	+/-1.2% max
Load Regulation ³	+/-8% max
Minimum Load	10% of Full Load
Short Circuit Protection	Momentary

INPUT SPECIFICATIONS

Input Voltage Range	+/-10% max
Input Filter	Capacitor Type
Protection	Fuse Recommended

GENERAL SPECIFICATIONS

Efficiency	80%-87%	
Isolation Voltage ⁴	3000 VDC min	Standard Models
Isolation Resistance	10 ⁹ ohms min	
Isolation Capacitance	80pF max	
Switching Frequency	60KHz Typ	
MTBF ⁵	>1,800,000 Hours	
Weight	2.9g Typ	
Case Material	Non-Conductive Plastic	
Case Size	19.6mm*7.5mm*10.2mm	

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature (OUTPUT=5V)	-40°C to +80 °C
Operating Temperature (OUTPUT=12V&15V)	-40°C to +85 °C
Storage Temperature	-55 °C to +125 °C
Humidity	95% max
Cooling	Free-Air Convection

ALL SPECIFICATIONS TYPICAL AT NOMINAL LINE, FULL LOAD AND 25°C UNLESS OTHERWISE NOTED.

¹ Measured with 1uF ceramic capacitor connects to the output pins.

² Line Regulation is for a 1.0% change in input Voltage.

³ Load Regulation is for output load current change from 20% to 100%.

⁴ 3000VDC for 3 seconds.

⁵ MIL-HDBK-217F @25 °C , Ground Benign.

● SELECTION GUIDE(1) 3W OUTPUT

MODEL NUMBER	INPUT VOLTAGE (VDC)	OUTPUT VOLTAGE (VDC)	OUTPUT CURRENT (mA)	INPUT ⁶		EFF (%) ⁷	ISOLATION (VDC)	PACKAGE
				CURRENT(mA)				
				FULL LOAD	NO LOAD			
PUS-0505B3	5	5	600	731	68	82	3000	B
PUS-0509B3	5	9	333	706	68	85	3000	B
PUS-0512B3	5	12	250	706	68	85	3000	B
PUS-0515B3	5	15	200	698	68	86	3000	B
PUS-1205B3	12	5	600	305	28	83	3000	B
PUS-1209B3	12	9	333	294	28	85	3000	B
PUS-1212B3	12	12	250	294	28	86	3000	B
PUS-1215B3	12	15	200	287	28	86	3000	B
PUS-2405B3	24	5	600	152	15	83	3000	B
PUS-2409B3	24	9	333	147	15	85	3000	B
PUS-2412B3	24	12	250	147	15	86	3000	B
PUS-2415B3	24	15	200	144	15	88	3000	B

Note: Other input to output voltages may be available. Please contact factory.


● PARTNUMBERS STRUCTURE

Model Name	Difference
PUv-x1x2x3x4 PUv-x1x2x3x4x5-zzz	P=Series Name U=Unregulated v=Type of output voltage (S=Single output ; D=Dual output) x1=Input voltage (03.3~4.5V ; 05~8.5V ; 09~11.5V ; 12~14.5V ; 15~18V ; 19~24V) x2=Output voltage (03.3~4.5V ; 05~8.5V ; 09~11.5V ; 12~14.5V ; 15~18V ; 19~24V) x3=Difference Package X4=Type of output power X5=Function zzz= 0~9 , A~Z or blank for market purpose

⁶ NOMINAL INPUT VOLTAGE.

⁷ NOMINAL INPUT VOLTAGE, FULL LOAD.

● MECHANICAL DIMENSIONS & RECOMMENDED FOOTPRINT DETAILS

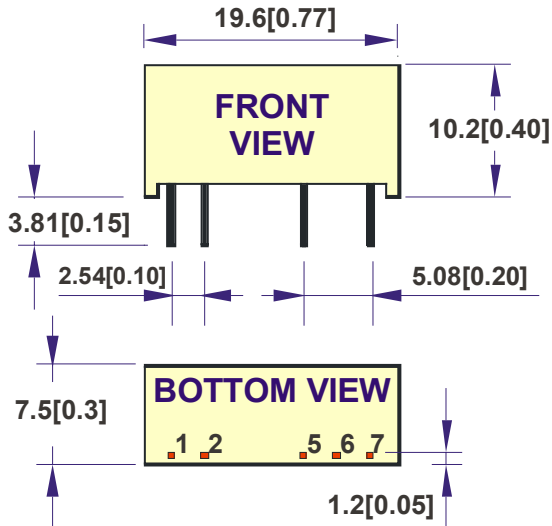

PIN	SINGLE
1	+Vin
2	-Vin
5	-Vout
7	+Vout


NOTE : All Dimensions In mm(Inches)

1. PinSize is 0.50x0.30mm[0.02x0.01"]

2. Pin is Tolerance .XX= ± 0.05 mm


3. Tolerance .X or .XX= ± 0.5 mm

All dimensions are in mm[inches]

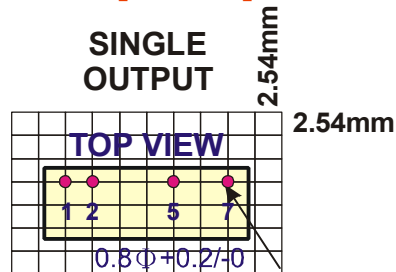


● SIMPLIFIED SCHEMATIC

SINGLE OUTPUT

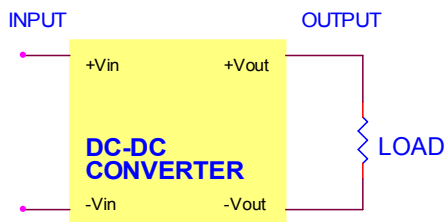

● TYPICAL APPLICATIONS


SINGLE OUTPUT

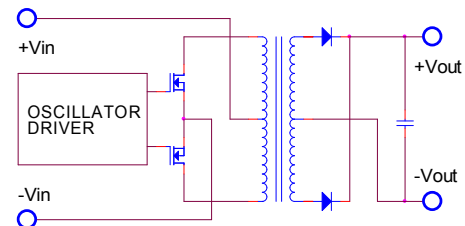


● TYPICAL PERFORMANCE CURVES

Specifications typical at $T_A=25^{\circ}\text{C}$, nominal input voltage, rated output current unless otherwise specified.


VOUT VS LOAD(5Vout Models)

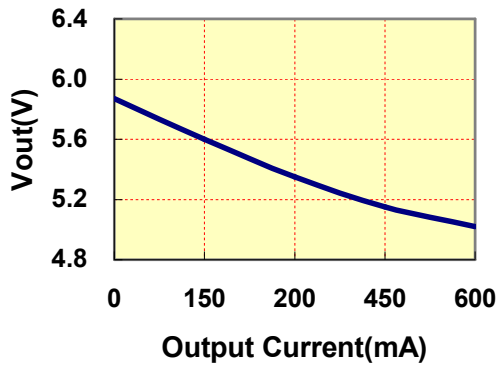


VOUT VS LOAD(9Vout Models)

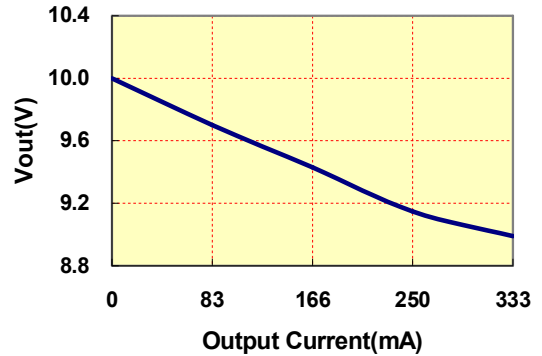


VOUT VS LOAD(12Vout Models)

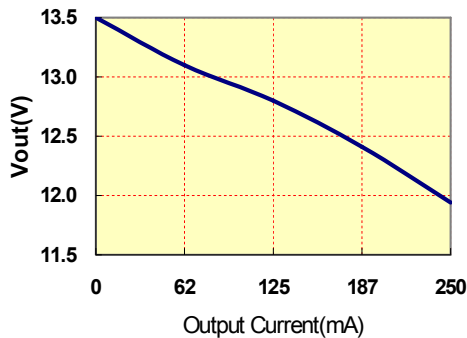


VOUT VS LOAD(15Vout Models)

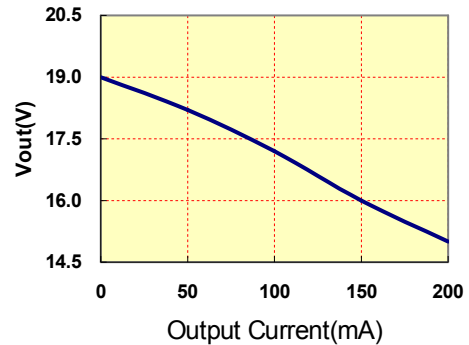

DERATING CURVES

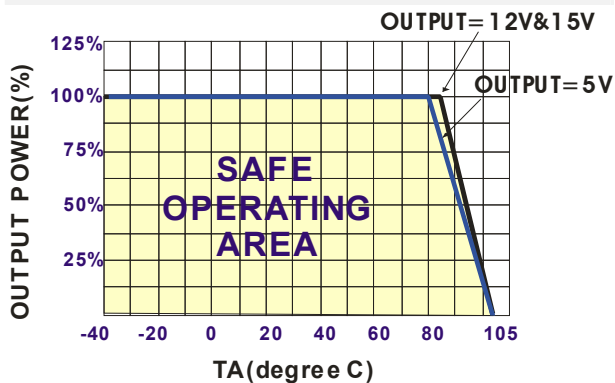

EFFICIENCY VS LOAD

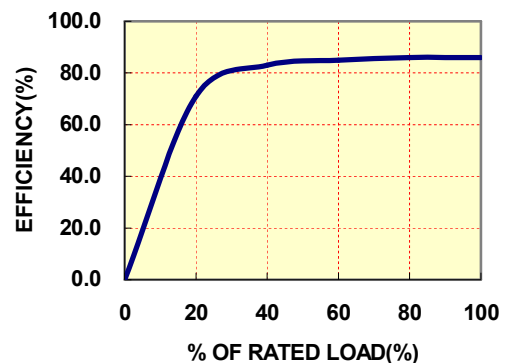

● INPUT FUSE SELECTION GUIDE

4.5-5.5V INPUT VOLTAGE (VDC)	10.8-13.2V INPUT VOLTAGE (VDC)	21.6-26.4V INPUT VOLTAGE (VDC)
1800mA Slow-Blow Type	750mA Slow-Blow Type	400mA Slow-Blow Type

Note: Certain applications may require the installation of external fuse in front of the input.

PU-3 SERIES APPLICATION NOTES:

EXTERNAL CAPACITANCE REQUIREMENTS:

Output filtering is required for operation. A minimum of 10uF is needed. Output capacitance may be increased for additional filtering, not to exceed 220uF.

To meet the reflected ripple requirements of the converter, an input impedance of less than 0.5ohm from DC to 250KHz is required.

We Can Offer EMC-Filter According To EN55011/22 Class B.

Negative Outputs:

A negative output voltage may be obtained by connecting the +OUT to circuit ground and connecting -OUT as the negative output.